

GIT-CND53611/AR


5MP 1/1.8" CMOSWDR ICR D/N IR Dome Camera



■ Features

- UP to 5 megapixel resolution(2592 × 1944)
- Max 30fps@5MP(2592 × 1944),60fps@2MP(1920 × 1080)
- H.265MainProfile, H.264Baseline/MainProfile/HighProfile
- WDR(100dB)
- Day/Night(ICR)&3D DNR&AWB&AGC&BLC
- Smart IR Function,IR range(5~20m)
- Lens(3.6~11mm),Motorized-lens Optional
- Alarm&Audio interface
- Support mobile phone monitoring and P2P function
- PoE function
- IP66 rating

■ Structure Diagrams

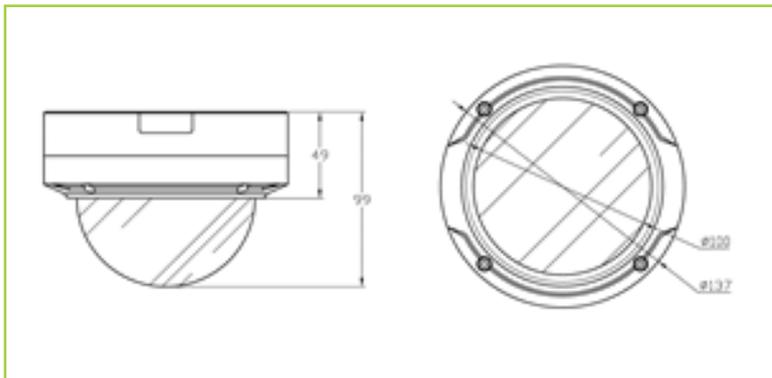

■ Sepsification

| Model | GIT-CND53611/AR |
|-------------------------------|---|
| Camera | |
| Media Processor | High-performance Hisilicon DSP |
| Image Sensor | 1/1.8" 5MP progressive scan CMOS |
| Shuttle time | 1/5s to 1/50,000s |
| Min Illumination | Color : 0.001 Lux /F1.4 B/W : 0.0001 Lux / F1.4;0Lux IR On |
| Lens | 3.6~11mm optional |
| Motorized-Lens | 3.6~11mm lens with AF optional |
| IR Range | Up to 20m |
| Day&Night | IR cut filter with auto switch |
| Compression | |
| Video Compression | H.265/H.264/MJPEG |
| Coding standard | H.265 MainProfile,H.264Baseline/MainProfile/HighProfile, |
| Audio Compression | G.711a/G.711u/RAW_PCM |
| Audio Bit Rate | G.711a(8kbps)/G.711u(8kbps)/RAW_PCM(16kbps) |
| Image | |
| Max Image Size | 2592(H) × 1944(V) |
| Stream | Three-streams |
| Frame Rate | First Stream : 30fps @ (2592 × 1944); Second-stream: 30fps@ (640 × 480); Third-stream : 30fps@ (352 × 288); |
| Network | |
| Alarm Trigger | Motion detection,storage exception |
| Protocols | IPv4/IPv6' RTSP/RTP/RTCP' TCP/UDP' HTTP' DHCP' DNS' FTP' DDNS' PPPoE' SMTP' QOS' Onvif |
| Onvif | V2.6.1/Profile S |
| Browser | IE(8' 9' 10' 11),Chrome,Firefox,Safaribetc,etc |
| Software Development Kit | Linux/Windows C++/C SDK |
| Interface | |
| Memory Slot | Mico SD, max up to128G for local storage |
| Audio In | 1-channel |
| Audio Out | 1-channel |
| Alarm | 1 In/1 Out |
| Video Out | 1 ch analog |
| Network | 1 RJ45 10M/100M adaptive Ethernet port |
| Reset | A reset button (press and hold 3 seconds valid) |
| General Specifications | |
| Operating Conditions | -40°C ~ 60°C,humidity less than 95% |
| Power Supply | DC12V ± 10%,PoE (802.3af) |
| Power Consumption | 6W |
| Weather proof rating | IP66 |
| Dimensions(mm) | φ 137 × 99 |
| Weight(kg) | 0.8 |