

## Fisheye IP Camera


### 5MP 1/1.8" CMOS Fisheye Dome IP Camera



### Features

- UP to 5 megapixel resolution (2592×1944)
- Max 30fps@5MP(2592×1944)
- H.265 MainProfile, H.264 Baseline / MainProfile / HighProfile
- WDR (100dB)
- Day/Night(ICR) & 3D DNR & AWB & AGC & BLC
- Fisheye Lens (1.57mm)
- SD storage (up to 128GB)
- Support mobile phone monitoring and P2P function
- PoE function
- IP66 rating
- Star Light

### Structure Diagrams

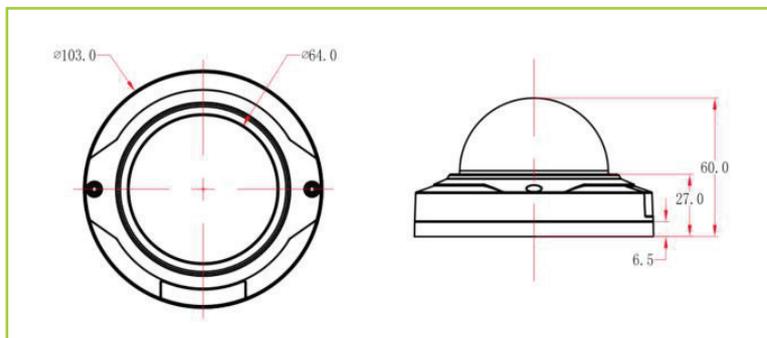

### Specification

Model	GIT-CNF51570/AU
<b>Camera</b>	
Media Processor	High-performance Hisilicon DSP
Image Sensor	1/1.8" 5MP progressive scan CMOS
Shuttle time	1/5s to 1/50,000s
Min Illumination	Color:0.05 Lux /F1.2; B/W:0.001 Lux /F1.2;0Lux IR On
Fisheye Lens	1.57mm
Day&Night	IR cut filter with auto switch
<b>Compression</b>	
Video Compression	H.265 / H.264 / MJPEG
Coding standard	H.265 MainProfile, H.264 Baseline / MainProfile / HighProfile
<b>Image</b>	
Max Image Size	2592(H)×1944(V)
Stream	Three-Stream
Frame Rate	Main Stream : 30fps @(2592 × 1944) Sub-stream : 30fps (640 × 480) Third-Stream : 30fps(N) (352 × 288)
<b>Network</b>	
Alarm Trigger	Motion detection, tampering alarm, network disconnect, storage exception
Protocols	IPv4 / IPv6, RTSP / RTP / RTCP, TCP / UDP, HTTP, DHCP, DNS, FTP, DDNS, PPPoE, SMTP, QOS, Onvif
Onvif	V2.6.x Version
Browser	E(8, 9, 10, 11), Chrome, Firefox, Safari, etc
S/W Development Kit	Linux / Windows C++ / C SDK
<b>Interface</b>	
Network	1 RJ45 10M / 100M adaptive Ethernet port
Reset	A reset button (press and hold 3 seconds valid)
<b>General Specifications</b>	
Operating Conditions	-40°C ~ 60°C, humidity less than 95%
Power Supply	DC12V ±10%, PoE (802.3af)
Power Consumption	<2.5W
Weather proof rating	IP66
Dimensions(mm)	103 x 60
Weight(kg)	0.3