

Weather Proof Type PTZ IP Camera


2MegaPixel Bullet IP Camera



■ Features

- 0.002Lux Starlight
- Sony Exmor Progressive Scan CMOS
- x12 Optical Zoom
- 255 preset, 8 patrol Support
- H.265
- ICR Filter (Day/Night Auto Switch)
- 3D-DNR, Privacy Masking, Motion Detection Support
- Micro SD/SDHC/SDXC Card Local Storage
- IP 66
- ONVIF Profile S Support

■ Structure Diagrams

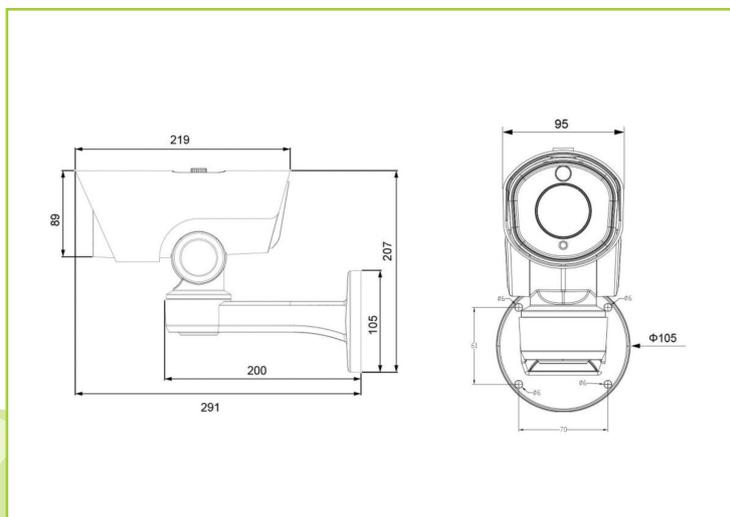

■ Specification

Model	GIT-CNW25060/BUR	
Camera	image Sensor	1/2.8" Progressive Scan CMOS
	Min. Illumination	Color : 0.002Lux@F1.2 B/W : 0Lux with IR on
	WDR	Super WDR Max. 140dB
	Shutter time	1/100000s ~ 1/5s
	Day & Night	ICR Filter Auto Switch
	IR Distance	60m
	Gain Control	Auto/Manual
Lens	Focal Length	5 ~ 60mm, x12 AF Lens
	Field of View	59.4° ~ 5.1° (Wide-Tele)
	Minimum Working Distance	1000 ~ 1500mm (Wide-Tele)
	Aperture	F1.6 ~ F2.8
PTZ	Pan Range	360° endless
	Tilt Range	-45° ~ 30° (Auto Flip)
	Speed	0.2° ~ 60° 100°/s(H), 0.2° ~ 30° 60°/s(V)
	Preset	255
	Patrol	8 Patrols (up to 48 preset each patrol)
	Pattern	4 Patterns
	Power Loss Recovery	Support
	PTZ Position Display	On / Off
	3D positioning	Support
	Video	Max. Image Resolution
Frame Rate		30fps(1920x1080), 30fps(1280x960), 30fps(1280x720), 30fps(704x576)
Video Compression		H.265(HEVC)/H.264/MJPEG
Video Bit Rate		16Kbps~16Mbps(CBR/VBR Adjustable)
Audio	Audio In/Out	1/1
	Audio Compression	G.711/AAC
Network	Ethernet	1 x RJ45 10M/100M Ethernet Port
	Network Storage	NAS (Support NFS, SMB/CIFS)
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN
System	Storage	Support Micro SD Card Local Storage (up to 128G)
	Advanced Function	Motion Detection, Privacy Masking, Anti-fog Backlight Compensation, HLC, 3D-DNR, ROI
	SIP/VoIP Support	Yes, Voice & Video-over-IP
	Event Trigger	Motion Detection, Network Disconnection, External Input, Audio Alarm, etc.
	Event Action	FTP Upload / SMTP Upload / SD Card Record / SIP Phone
General	System Compatibility	ONVIF Profile S
	Working Temperature	-30°C ~ 60°C
	Working Humidity	0 ~ 90%(Non-condensing)
	Power Supply	DC 12V, 2A
	Power Consumption	11.5W MAX / 15.5W MAX (IR Only)
	Weather Proof	Up to IP 66 Rating for Weather-resistant Performance
	Dimensions	291mmX207mmX95mm
Weight	2Kg	